

Citrix ShareFile API Provider Setup

Last Modified on 03/19/2020 5:56 pm EDT

To authenticate a Citrix ShareFile connector instance you must register an app with Citrix ShareFile. When you authenticate, use the **Client Id**, **Client Secret**, and **Redirect URI** as the **Sharefile API Key**, **Sharefile API Secret**, and **Callback URL**.


See the latest setup instructions in the [Citrix ShareFile documentation](#).

Locate Credentials for Authentication


If you already created an application, follow the steps below to locate the **Client Id**, **Client Secret**, and **Redirect URI**. If you have not created an app, see [Create an Application](#).

To find your OAuth 2.0 credentials:

1. Log in to your account at [Citrix ShareFile](#).
2. Click **Get an API Key**.

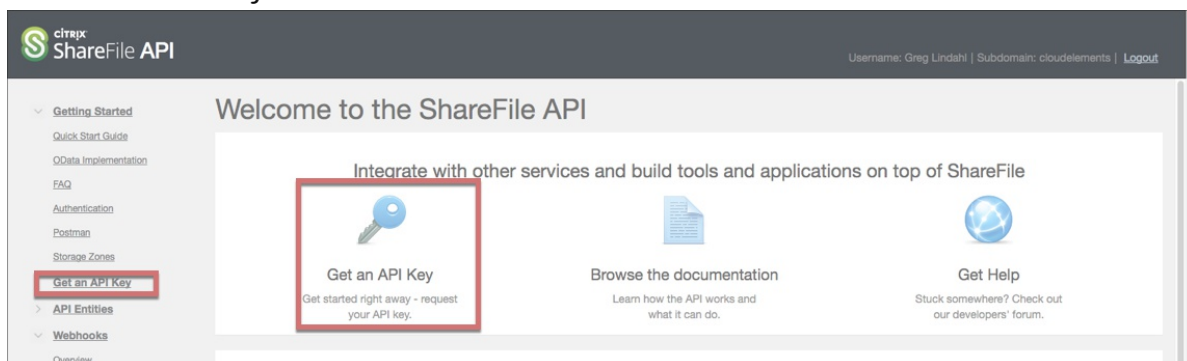

3. In Your API Keys, record the **Client Id**, **Client Secret**, and **Redirect URI** for your app.

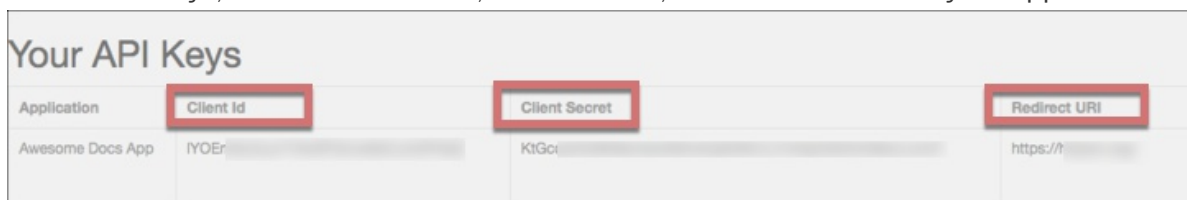


Create an Application

If you have not created an application, you need one to authenticate with Citrix ShareFile.

To create an application:

1. Log in to your account at [Citrix ShareFile](#).
2. Click **Get an API Key**.

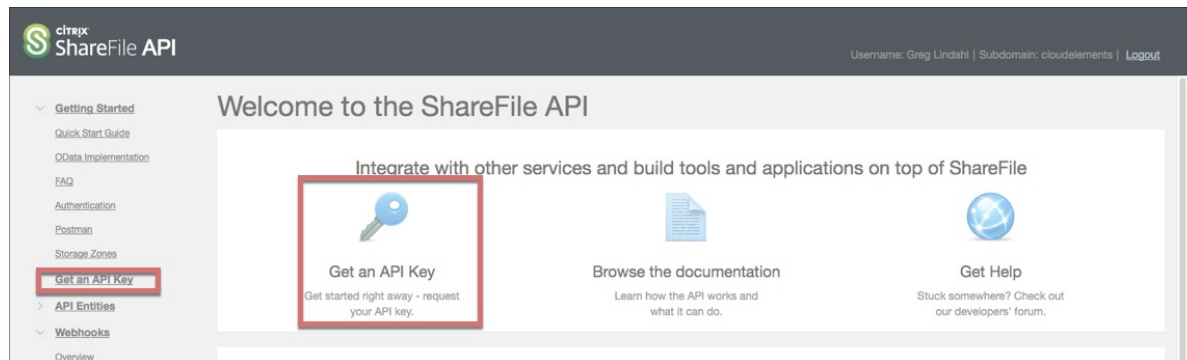

3. In API Key Generator enter an Application Name and Description.
4. In **Redirect URI** enter the OAuth redirect URL for your application. You will need this when you authenticate a connector instance.
5. Click **Generate API Key**.
6. Record the **Client Id**, **Client Secret**, and **Redirect URI** for your app.

