

Square API Provider Setup

Last Modified on 01/02/2020 12:03 pm EST

To authenticate a Square connector instance, you must register an app with Square. When you authenticate, use the **Application ID**, **Application Secret**, and **Redirect URL** as the **API Key**, **API Secret**, and **Callback URL**. If you plan to monitor events, also configure the **Webhook URL**.


See the latest setup instructions in the [Square documentation](#).

Locate Credentials for Authentication


If you already created an application, follow the steps below to locate the **Application ID**, **Application Secret**, and **Redirect URL**. If you have not created an app, see [Create an Application](#).

To find your OAuth 2.0 credentials:

1. Log in to your account at [Square](#).
2. Click the application that you want to connect.
3. Record the **Application ID**.

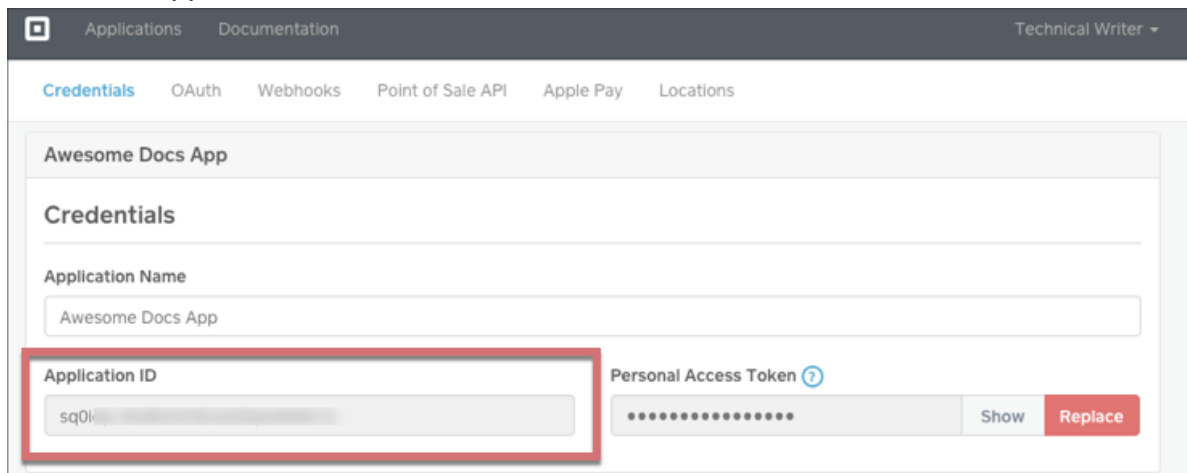

4. Click the **OAuth** tab, and then record the **Application Secret** and **Redirect URL**.

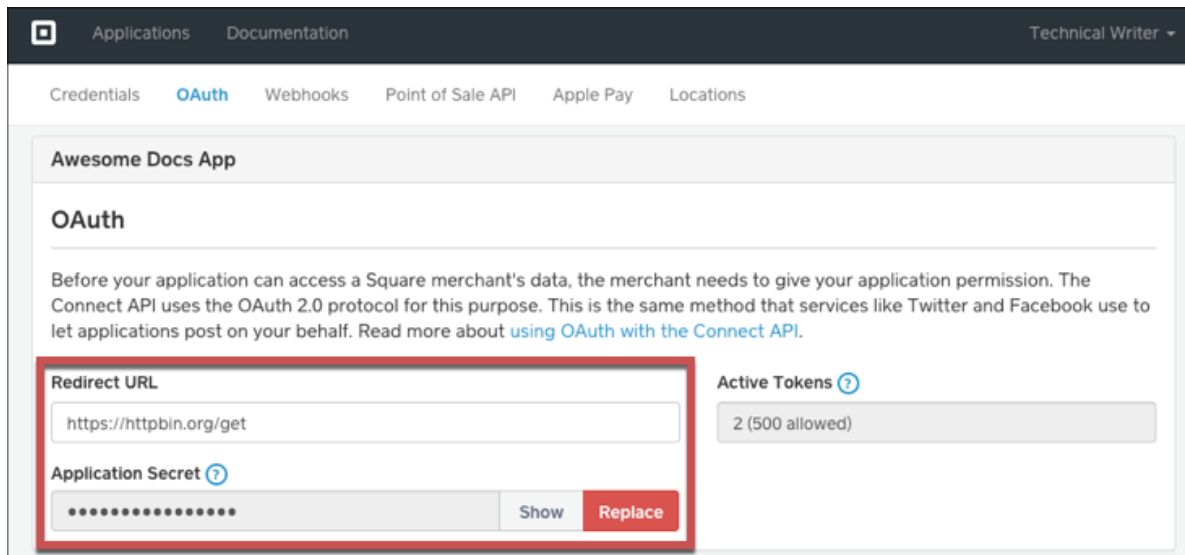


Create an Application

If you have not created an application, you need one to authenticate with Square.

To create an application:

1. Log in to your account at [Square](#).
2. Click the application that you want to connect.
3. On the Application Dashboard, click **New Application**.
4. Enter a name, agree to the terms of service, and then click **Create Application**.

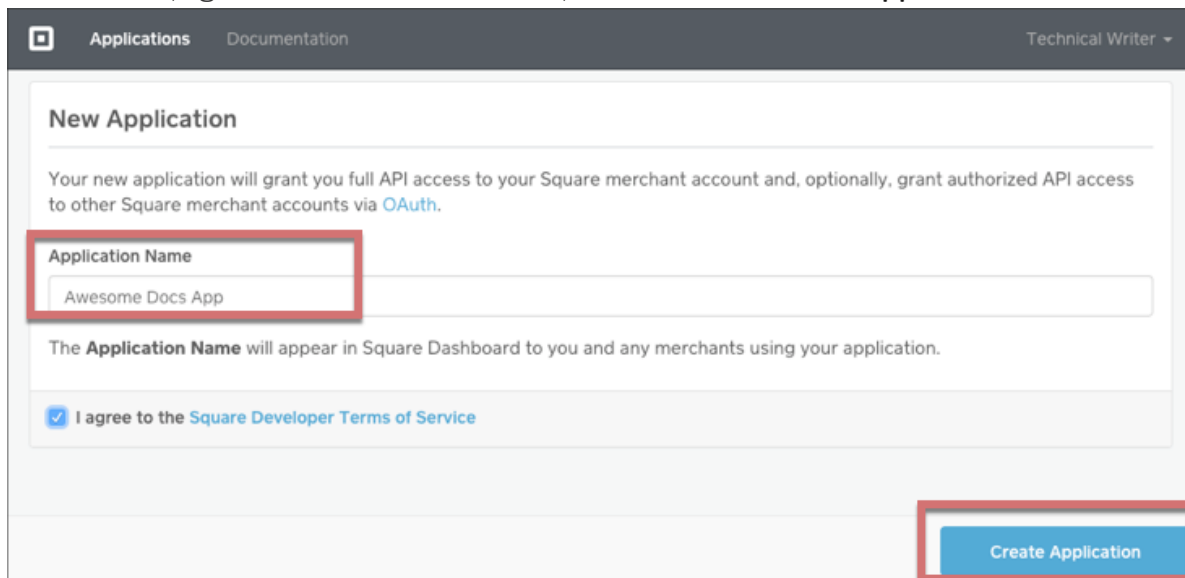

5. Record the **Application ID**.

Applications Documentation Technical Writer

Credentials OAuth Webhooks Point of Sale API Apple Pay Locations

Awesome Docs App

Credentials

Application Name

Awesome Docs App

Application ID

sq0l:.....

Personal Access Token ?

..... Show Replace

6. Click the **OAuth** tab, and then enter your OAuth callback URL in **Redirect URL**.
7. Record the **Application Secret** and **Redirect URL**.

Applications Documentation Technical Writer

Credentials **OAuth** Webhooks Point of Sale API Apple Pay Locations

Awesome Docs App

OAuth

Before your application can access a Square merchant's data, the merchant needs to give your application permission. The Connect API uses the OAuth 2.0 protocol for this purpose. This is the same method that services like Twitter and Facebook use to let applications post on your behalf. Read more about [using OAuth with the Connect API](#).

Redirect URL

https://httpbin.org/get

Application Secret ?

..... Show Replace

Active Tokens ?

2 (500 allowed)