

Salesforce Sales Cloud API Provider Setup


Last Modified on 03/22/2021 7:49 am EDT

To authenticate a Salesforce Sales Cloud connector instance, you must have the Salesforce Sales Cloud Enterprise edition or Professional edition with API support. Also, to set up a new application in Salesforce Sales Cloud, you must have Administrator privileges. Contact your system administrator if you do not have those privileges.

Note: Salesforce provides the most up-to-date and detailed setup instructions at [Salesforce.com REST API Developer Guide](#)

To set up the endpoint:

1. Via a web browser, log in to your [Salesforce account](#). If not already on the Setup page, [navigate to it](#).
2. In the menu on the left, click **Apps**, and then click **App Manager**. Alternatively, you can also search for **App Manager** using **Quick Find**.

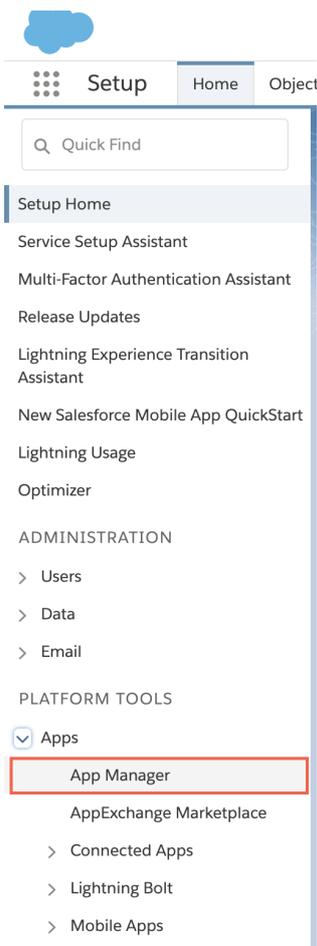

3. Click **New Connected App**.
4. Complete the Basic Information section.
5. In the API (Enable OAuth Settings) section, select **Enable OAuth Settings**.
6. Enter **Callback URL**- <https://auth.cloudelements.io/oauth> to redirect the user to SAP Open Connectors after authentication.

7. In **Selected OAuth Scopes**, add the scopes needed from Available to Selected.

Note: The default scopes are Full Access and Perform requests on your behalf at any time (refresh_token_, offline_access); if the default scopes do not correspond with the desired access, the scope parameter can be overwritten when sending the GET api call for the Oauth process to return the provider code.

8. Complete the remaining settings as needed for your app.

9. Click **Save** at the bottom of the window.

10. Click **Continue**.

11. Note the following in the API (Enable OAuth Settings) section, which you will need to authenticate a SAP Open Connectors Salesforce connector instance with Salesforce.

- o Consumer Key
- o Consumer Secret
- o Callback URL

▼ API (Enable OAuth Settings)	
Consumer Key	Consumer Secret
Selected OAuth Scopes	Callback URL
Full access (full) Perform requests on your behalf at any time (refresh_token, offline_access)	
Enable for Device Flow <input type="checkbox"/>	Require Secret for Web Server Flow <input checked="" type="checkbox"/>
Token Valid for 0 Hour(s)	Include Custom Attributes <input type="checkbox"/>
Include Custom Permissions <input type="checkbox"/>	